

DSE8661

TWO PART AUTO TRANSFER SWITCH & MAINS CONTROL MODULE

FEATURES



The DSE8661 is an easy-to-use two part mains controller with automatic transfer switch capability between remote breakers of upto 1.2 km . Designed to synchronise single or multiple DSE8x10s and DSE8680s with a single mains (utility) supply, the DSE8661 will automatically control the change over from mains (utility) to generator supply or run generators in synchronisation with the mains (utility) to provide no-break, peak lopping and peak shaving power solutions.

The module can indicate operational status and fault conditions on the LCD screen (multiple languages available), by illuminated LED, audible sounder and SMS messaging.

Comprehensive communications are also available via RS232, RS485 & Ethernet for remote PC control and monitoring, and integration into building management systems. The comprehensive event log will record up to 250 events to facilitate maintenance.

An extensive number of fixed and flexible monitoring and protection features are included. Easy alteration of the sequences, timers and alarms can be made using the DSE PC Configuration Suite Software. Selected configuration is also available via the module's front panel.

With all communication ports capable of being active at the same time, the DSE8xxx Series is ideal for a wide variety of demanding load share applications.

KEY LOAD SHARE FEATURES:

- Peak lopping/sharing
- Sequential set start
- Manual voltage/frequency adjustment
- R.O.C.O.F. and vector shift protection
- Generator load demand
- Automatic hours run balancing
- Mains (Utility) de-coupling
- Mains (Utility) de-coupling test mode
- Bus failure detection
- Volts and frequency matching.
- kW & kV Ar load sharing

ENVIRONMENTAL TESTING STANDARDS

ELECTRO MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950
Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE

BS EN 60068-2-1
Ab/Ae Cold Test -30°C
BS EN 60068-2-2
Bb/Be Dry Heat +70°C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5Hz to 8Hz @ +/-7.5mm, 8Hz to 500Hz @ 2gn

HUMIDITY

BS EN 60068-2-30
Db Damp Heat Cyclic 20/55°C @ 95% RH 48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40°C @ 93% RH 48 Hours


SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes
15gn in 11mS

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529
IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF LOAD SHARE APPLICATIONS

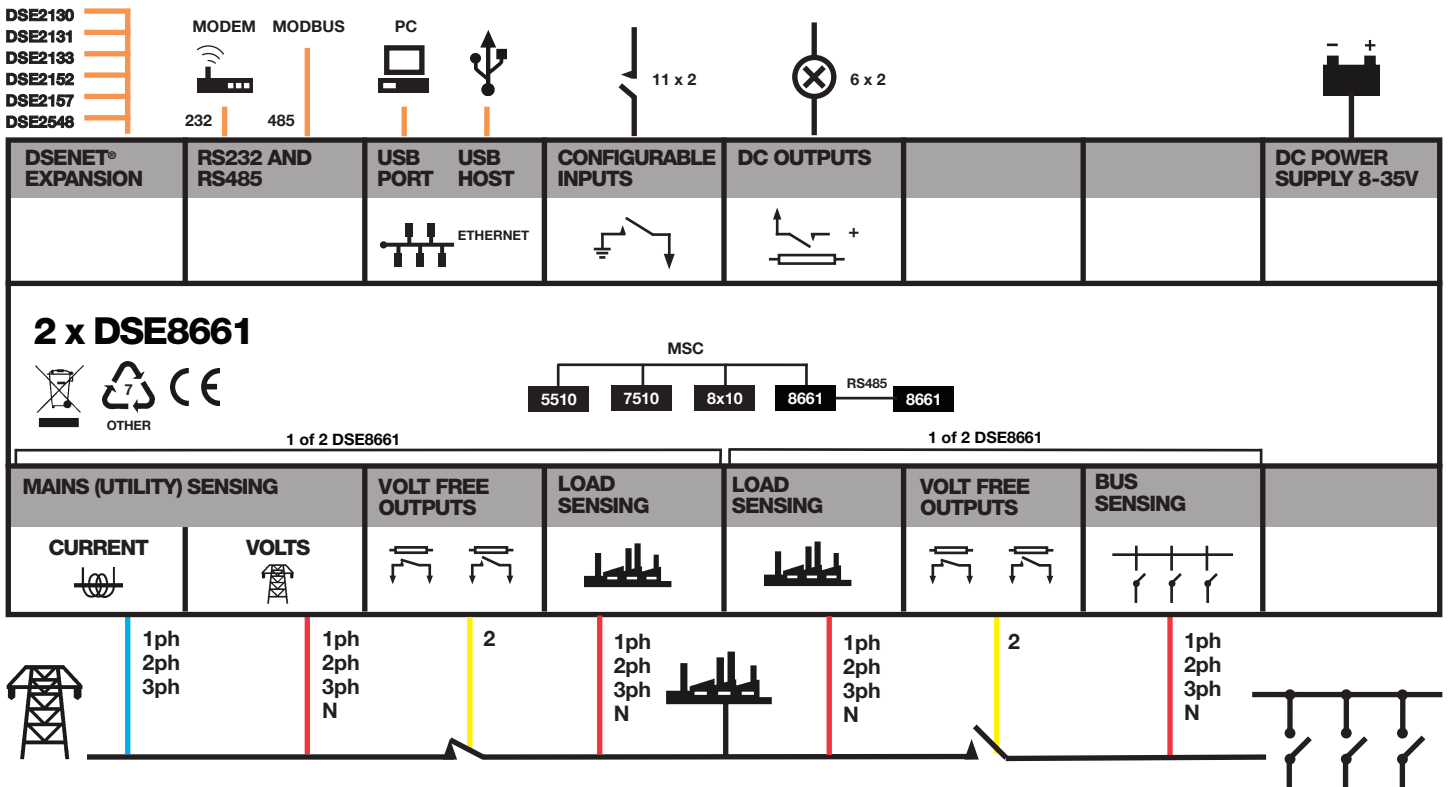

DSE8661

TWO PART AUTO TRANSFER SWITCH & MAINS CONTROL MODULE

FEATURES



MAINS BREAKER CONTROLLER



BUS BREAKER CONTROLLER



1.2 km

RS485

KEY FEATURES

- Mains (utility) failure detection
- Mains (utility) power monitoring (kW, kV Ar, kV A and pf)
- Comprehensive synchronising and loadsharing capabilities
- Peak lopping & shaving functionality
- Mains (utility) kW export protection
- Mains (utility) de-coupling protection
- Advanced integral PLC editor
- User configurable RS232, RS485 & Ethernet communications
- MODBUS RTU & TCP support
- User configurable MODBUS pages
- Advanced SMS control and fault messaging (addition GSM modem required)
- DSENet expansion compatible
- Data logging and trending
- 4-Line back-lit LCD text display
- Multiple display languages
- Five key menu navigation
- Front panel editing with PIN protection

- Customisable status screens
- Configurable inputs (11)
- Configurable outputs (8)
- Configurable timers and alarms
- Multiple entry scheduler
- Configurable event log (250)
- Easy access diagnostic pages
- LED and LCD alarm indication
- USB connectivity
- Backed up real time clock
- Fully configurable via DSE Configuration Suite PC Software

KEY BENEFITS

- Two part solution allows upto 1.2 km between mains (utility) & bus breakers.
- Compatible with DSE5510, DSE7510 & DSE8x10 series of modules
- 132 x 64 pixel ratio display for clarity
- Real-time clock provides accurate event logging
- Ethernet communication provides built in advanced remote monitoring
- Can be integrated into building management systems and Programmable logic control(PLC)

- Increased input and output expansion capability via DSENet®
- Licence-free PC software
- IP65 rating (with supplied gasket) offers increased resistance to water ingress
- Advanced Internal PLC editor allows user configurable functions to meet specific application requirements.
- Improved support for multi-voltage systems
- Clear demarcation between genbus and mains breakers

EXPANSION DEVICES

- DSE124 CAN/MSC Extender
- DSE2130 Input Expansion Module
- DSE2131 Ratio-metric Input Expansion Module
- DSE2133 RTD & Thermo-couple Expansion Module
- DSE2152 Ratio-metric Output Expansion Module
- DSE2157 Output Expansion Module
- DSE2548 LED Expansion Module

SPECIFICATION

DC SUPPLY
CONTINUOUS VOLTAGE RATING
 8 V to 35 V Continuous

CRANKING DROPOUTS
 Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

MAXIMUM OPERATING CURRENT
 340 mA at 12 V, 160 mA at 24 V

MAXIMUM STANDBY CURRENT
 160 mA at 12 V, 80 mA at 24 V

MAINS (UTILITY)
VOLTAGE RANGE
 15 V to 333 V AC (L-N)

FREQUENCY RANGE
 3.5 Hz to 75 Hz

LOAD
VOLTAGE RANGE
 15 V to 333 V AC (L-N)

FREQUENCY RANGE
 3.5 Hz to 75 Hz

BUS
VOLTAGE RANGE
 15 V to 333 V AC (L-N)

FREQUENCY RANGE
 3.5 Hz to 75 Hz

OUTPUTS
OUTPUTS C & D
 8 A at 250 V AC (Volt free)

AUXILIARY OUTPUTS E,F,G,H, I & J
 2 A DC at supply voltage

DIMENSIONS
OVERALL
 240 mm x 181 mm x 42 mm
 9.4" x 7.1" x 1.6"

PANEL CUT-OUT
 220 mm x 160 mm
 8.7" x 6.3"

MAXIMUM PANEL THICKNESS
 8 mm
 0.3"

OPERATING TEMPERATURE RANGE
 -30°C to +70°C

STORAGE TEMPERATURE RANGE
 -40°C to +85°C

RELATED MATERIALS

TITLE

DSE8661 Installation Instructions
 DSE8661 Operator Manual
 DSE8600 PC Configuration Suite Manual
 DSE8610 Data Sheet

PART NO'S

053-091
 057-204
 057-119
 055-083

DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH
TELEPHONE +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303
EMAIL sales@deepseapl.com **WEBSITE** www.deepseapl.com

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA
TELEPHONE +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708
EMAIL sales@deepseausa.com **WEBSITE** www.deepseausa.com