

DSE7110/20 MKII

AUTO START & AUTO MAINS FAILURE CONTROL MODULES

FEATURES



The DSE7110 MKII Auto Start Control Module and the DSE7120 MKII Auto Mains (Utility) Failure Control Module are suitable for a wide variety of single gen-set applications.

Monitoring engine speed, oil pressure, coolant temperature, frequency, voltage, current, power and fuel level, the modules will give comprehensive engine and alternator protection. This will be indicated on a large back-lit LCD icon display via an array of warning, electrical trip and shutdown alarms.

Electronic J1939 (CAN) and non-electronic MPU and alternator sensing engine support for diesel, gas and petrol engines all in one variant. With a number of flexible inputs, outputs and protections, the modules can be easily adapted to suit a wide range of applications.

Comprehensive power metering for both generator and load is available (kW, kV A, kV Ar, pf). A real time clock allows scheduling while a 50 event log provides extensive event interrogation.

Through USB Communication both modules can be easily configured using the DSE Configuration Suite PC Software or can be fully configured through the module's front panel editor.

All DSE products are supported by the DSE global technical support team which gives our customers and end users access to 24 hour system help and advice.

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950
Safety of Information Technology Equipment, including Electrical Business Equipment

OPERATING TEMPERATURE

BS EN 60068-2-1
Ab/Ae Cold Test -30 °C
BS EN 60068-2-2
Bb/Be Dry Heat +70 °C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5 Hz to 8 Hz @ +/-7.5 mm,
8 Hz to 500 Hz @ 2 gn

HUMIDITY

BS EN 60068-2-30
Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40 °C @ 93% RH 48 Hours


SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes
15 gn in 11 ms

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529
IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF GEN-SET APPLICATIONS

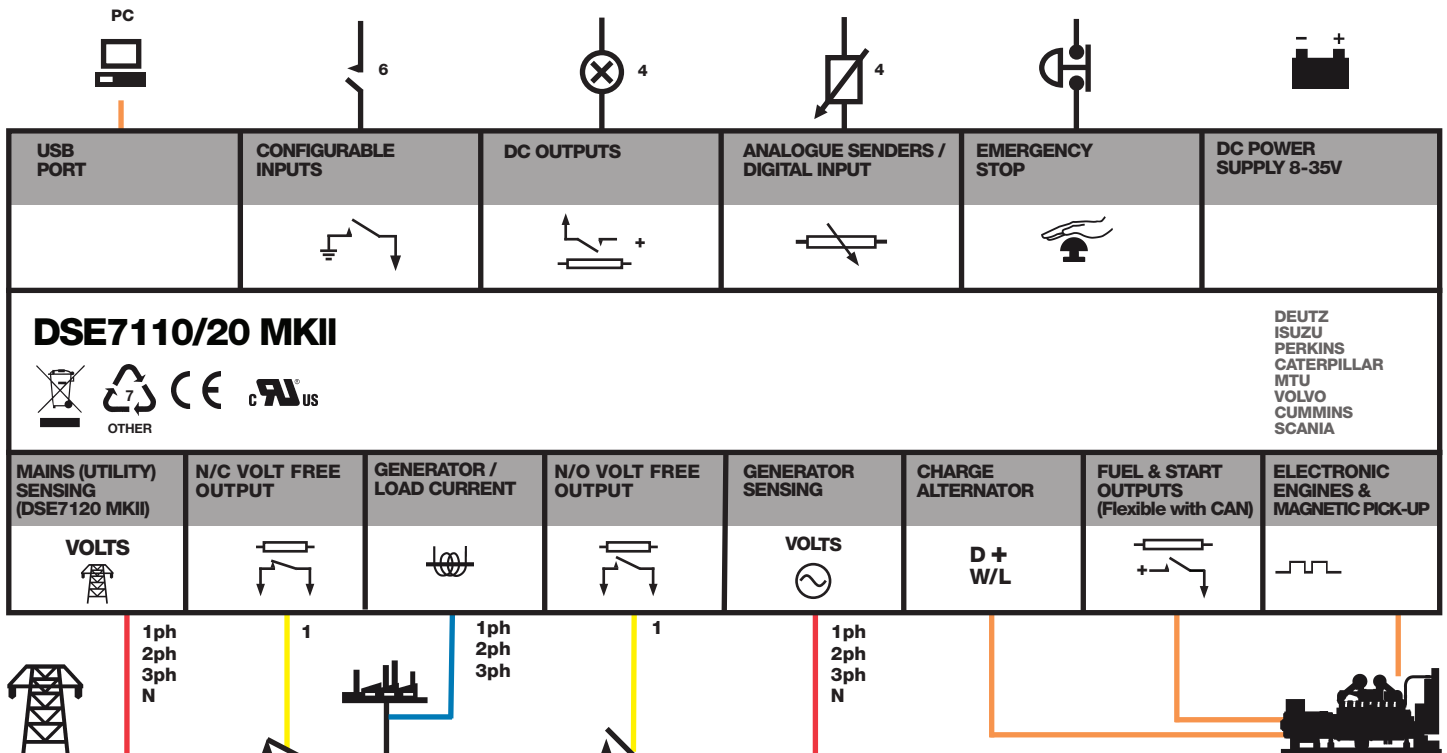

DSE7110/20 MKII

AUTO START & AUTO MAINS FAILURE CONTROL MODULES

FEATURES



DSE7110 MKII



DSE7120 MKII



KEY BENEFITS

- Automatically transfers between mains (utility) and generator (DSE7120 MKII only)
- Hours counter provides accurate information for monitoring and maintenance periods
- User-friendly set-up and button layout for ease of use
- Multiple parameters are monitored & displayed simultaneously
- The module can be configured to suit a wide range of applications
- Compatible with a wide range of CAN engines, including tier 4 engine support
- Uses DSE Configuration Suite PC Software for simplified configuration
- Licence-free PC software
- IP65 rating (with supplied gasket) offers increased resistance to water ingress

KEY FEATURES

- Large back-lit icon display
- Heated display option available
- Fully configurable via the fascia or PC using USB communication
- Extremely efficient power save mode
- 3 phase generator sensing
- 3 phase mains (utility) sensing (DSE7120 MKII only)
- Generator/load power monitoring (kW, kV A, kV Ar, pf)
- Generator overload protection (kW)
- Generator/load current monitoring and protection (configurable when using CAN)
- Fuel and start outputs
- 4 configurable DC outputs
- 2 configurable volt-free outputs
- 4 configurable analogue/digital inputs
- 6 configurable digital inputs
- Support for 0-10 V & 4-20 mA oil pressure sensors
- Configurable staged loading outputs
- CAN, MPU and alternator speed sensing in one variant
- 3 engine maintenance alarms
- Engine speed protection
- Engine hours counter
- Engine pre-heat
- Engine run-time scheduler
- Engine idle control for starting & stopping
- Battery voltage monitoring
- Start on low battery voltage
- Real time clock
- Fuel pump control
- Configurable remote start input
- 1 alternative configuration
- Comprehensive warning, electrical trip or shutdown protection upon fault condition
- LCD and LED alarm indication
- Event log (50)

RELATED MATERIALS

TITLE	PART NO'S
DSE7110/20 MKII Installation Instructions	053-151
DSE7110/20 MKII Operator Manual	057-182
DSE7110/20 MKII Configuration Suite PC Manual	057-185

DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH
TELEPHONE +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303
EMAIL sales@deepseapl.com **WEBSITE** www.deepseapl.com

Deep Sea Electronics Plc maintains a policy of continuous development and reserves the right to change the details shown on this data sheet without prior notice. The contents are intended for guidance only.

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA
TELEPHONE +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708
EMAIL sales@deepseausa.com **WEBSITE** www.deepseausa.com

Registered in England & Wales No.01319649
 VAT No.316923457

SPECIFICATION

DC SUPPLY

CONTINUOUS VOLTAGE RATING
 8 V to 35 V Continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 ms, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

MAXIMUM OPERATING CURRENT

290 mA at 12 V, 140 mA at 24 V

MAXIMUM STANDBY CURRENT

75 mA at 12 V, 40 mA at 24 V

CHARGE FAIL/EXCITATION RANGE

0 V to 35 V

GENERATOR & MAINS (UTILITY)

VOLTAGE RANGE
 15 V to 415 V AC (Ph to N)
 26 V to 719 V AC (Ph to Ph)

FREQUENCY RANGE

3.5 Hz to 75 Hz

MAGNETIC PICKUP

VOLTAGE RANGE
 +/- 0.5 V to 70 V

FREQUENCY RANGE

10,000 Hz (max)

INPUTS

DIGITAL INPUTS A TO F

Negative switching

ANALOGUE INPUTS A TO C

Configurable as:
 Negative switching digital input
 0 Ω to 480 Ω

ANALOGUE INPUT D

Configurable as:
 Negative switching digital input
 0 V to 10 V
 4 mA to 20 mA
 0 Ω to 480 Ω

OUTPUTS

OUTPUT A & B (FUEL & START)

10 A short term, 5 A continuous, at supply voltage

OUTPUTS C & D

8 A AC at 250 V AC (Volt-free)

AUXILIARY OUTPUTS E, F, G & H

2 A DC at supply voltage

DIMENSIONS

OVERALL

240 mm x 181 mm x 42 mm
 9.4" x 7.1" x 1.6"

PANEL CUT-OUT

220 mm x 160 mm
 8.7" x 6.3"

MAXIMUM PANEL THICKNESS

8 mm
 0.3"

STORAGE TEMPERATURE RANGE

-40°C to +85°C
 -40 °F to +185 °F

OPERATING TEMPERATURE RANGE

-30°C to +70°C
 -22 °F to +158 °F

HEATED DISPLAY VARIANT

-40 °C to +70 °C
 -40 °F to +158 °F