

DSE9460/9461

ENCLOSED INTELLIGENT BATTERY CHARGER

5 AMP & 10 AMP, 12 VOLT & 24 VOLT OPTIONS

FEATURES



The DSE94xx series of metal enclosed intelligent battery chargers have been developed with safety, usability, optimised battery performance and maximum battery lifetimes in mind.

The DSE94xx series can be used directly from the box, relying on a preconfigured lead/acid charging curve and selected manually for either 12V or 24V operation (including a voltage trimming potentiometer function). Alternatively they can be connected via a USB to a PC (using the free DSE PC configuration suite software) and can be configured with pre set charging curves for different battery types. The user also has the option of configuring their own bespoke charging curve for advanced battery applications.

A comprehensive range of input and output protections ensures a continued safe charging environment also enabling the use of the charger as a power supply. Higher charging / power supply currents can be achieved by linking together multiple chargers from this series.

The chargers can be integrated into an external system through modbus RTU using RS485 as well as an optional external remote LCD display being available.

AVAILABLE 5 AMP VERSIONS

9460-01	12v 5A (LCD)
9460-02	12v 5A (LCD & Meters)
9460-11	24v 5A (LCD)
9460-12	24v 5A (LCD & Meters)

AVAILABLE 10 AMP VERSIONS

9461-01	12v 10A (LCD)
9461-02	12v 10A (LCD & Meters)
9461-03	12v 10A (LED & Meters)
9461-04	12v 10A (LED)
9461-11	24v 10A (LCD)
9461-12	24v 10A (LCD & Meters)
9461-13	24v 10A (LED & Meters)
9461-14	24v 10A (LED)

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

TEMPERATURE

BS EN 60068-2-1
Ab/Ae Cold Test -30 °C
BS EN 60068-2-2
Bb/Be Dry Heat +80 °C
* Refer to de-rating curve in the DSE9000 Operator Manual

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5 Hz to 8 Hz at +/-7.5 mm,
8 Hz to 500 Hz at 2 gn


HUMIDITY

BS EN 60068-2-30
Db Damp Heat Cyclic 20/55 °C at 95% RH 48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40 °C at 93% RH 48 Hours

SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes
15 gn in 11 ms

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF BATTERY CHARGER APPLICATIONS

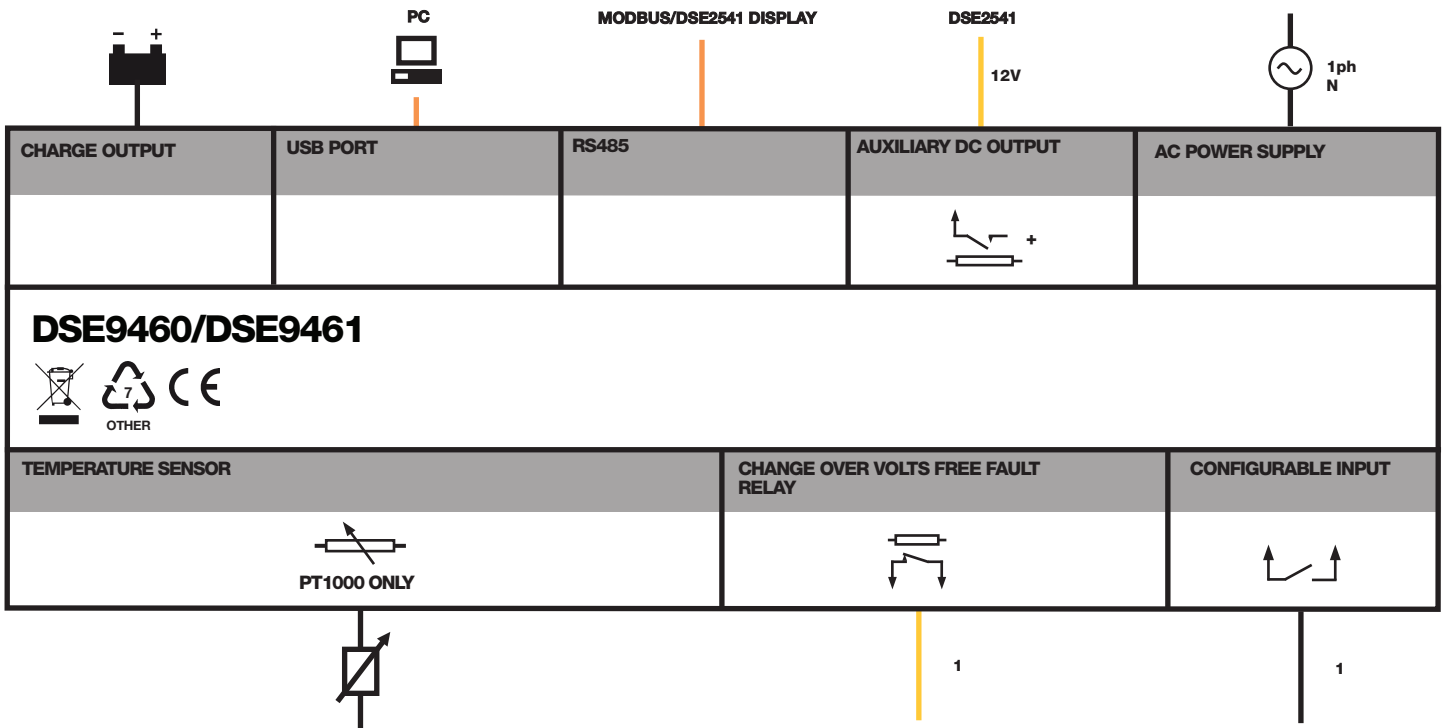

DSE9460/9461

ENCLOSED INTELLIGENT BATTERY CHARGER

5 AMP & 10 AMP, 12 VOLT & 24 VOLT OPTIONS

FEATURES



ADVANCED FEATURES

- Intelligent two, three and four stage charging profiles
- Configurable to suit most battery types (12V/24V)
- Adjustable current limit
- Can be used as a battery charger, power supply or both at the same time
- Automatic or Manual boost and storage charge functions to help maintain battery condition
- Digital Microprocessor Technology
- Temperature compensation for battery charging
- Low Output Ripple and superb line regulation
- Available in two variants (LCD display or LCD display & analogue meters)

Full Protection

- AC input Under voltage
- AC input Over voltage
- Battery charger output Over voltage
- Battery charger output Over current
- Battery temperature compensation with over temperature protection
- Output short circuit and Inversion polarity with auto recovery
- Automatic power de-rating at high ambient temperatures
- Battery charger failure indication

Automatic Boost Mode

- Boosts and equalises cell charge improving battery performance and life

Power Save Mode

- Once the battery is fully charged the chargers switch to Eco-Power to save energy

Communication

- Can be integrated into external systems through MODBUS RTU using RS485
- Fully configurable via DSE Configuration Suite PC Software
- External remote LCD option



KEY BENEFITS

- Fully flexible to maximise the life of the battery
- Suitable for a wide range of battery types
- Switched mode design
- Fault output
- Minimum 86% efficiency throughout full operating range
- No external intervention for boost mode
- Multiple chargers can be linked together to provide larger current output
- Can be permanently connected to battery and mains (utility) supply. No need to disconnect through high load conditions.

SPECIFICATION

AC SUPPLY

VOLTAGE RANGE
90 V to 305 V (L-N)

FREQUENCY RANGE
48 Hz to 64 Hz (L-N)

DC OUTPUT RATING

DSE9460 OUTPUT
5 A DC at 12 V & 24 V DC

DSE9461 OUTPUT
10 A DC at 12 V & 24 V DC

RIPPLE AND NOISE
<1%

EFFICIENCY
>86%

AUXILIARY OUTPUT
100 mA DC at 12 V

REGULATION
LINE
<0.5%

LOAD
2%

TEMPERATURE SENSOR INPUT
PT1000

PROTECTIONS

Short Circuit
DC Over Voltage
DC Over Current
Reverse Polarity
Over Temperature
AC Under & Over Voltage
Battery Charger Failure

CHARGE FAILURE RELAY
3 A at 30 V DC volt free relay

DIMENSIONS

OVERALL
165 mm x 305 mm x 110 mm
6.5" x 12" x 4.3"

WEIGHT
2.3 kg

OPERATING TEMPERATURE RANGE
-30 °C to +55 °C

STORAGE TEMPERATURE RANGE
-40 °C to +85 °C

RELATED MATERIALS

TITLE

DSE9000 Configuration Suite PC Software Manual
DSE Configuration Suite Installation & Operator Manual
DSE9460/DSE9461 Series Installation Instructions
DSE9460/DSE9461 Series Operator Manual
DSE2541 Data Sheet
DSE2541 Installation Instructions

PART NO'S

057-159
057-151
053-148
057-176
055-160
053-154

DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH
TELEPHONE +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303
EMAIL sales@deepseapl.com **WEBSITE** www.deepseapl.com

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA
TELEPHONE +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708
EMAIL sales@deepseausa.com **WEBSITE** www.deepseausa.com